


# 6 cavity manifold type RX

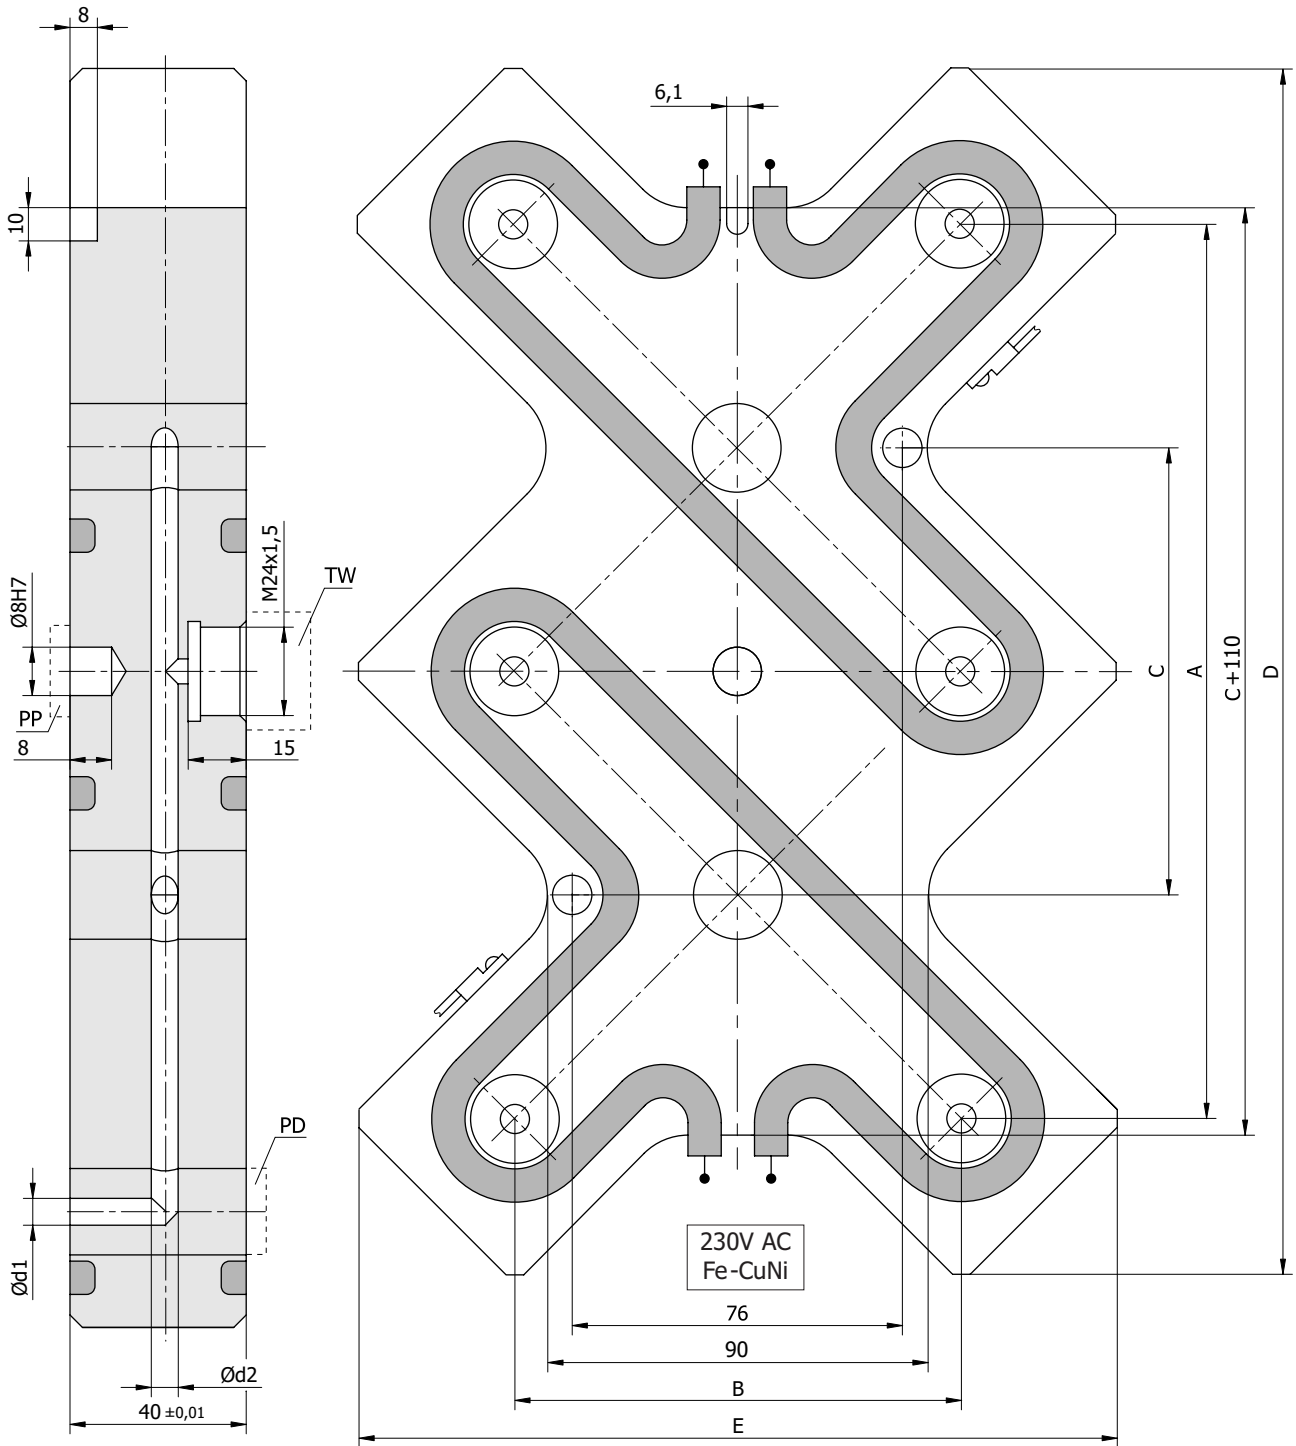

manifold type	A	B	C	D	E	Ø d1	Ø d2	P per zone	number of heating zones
RX - 1	200	100	100	262	163	4	6	1600	2
RX - 2	300	150	150	363	213	5,5	8	2200	2
RX - 3	400	200	200	463	263	7	10	2800	2
RX - 4	500	250	250	563	313	9	12	2200	4
RX - 5	600	300	300	663	363	11	14	2800	4

### Note:

- Dimension Ø8,5\* changes into M10 thread which facilitates removing manifold from the injection mould.
- Diameters of channels inside the manifold Ød1 and Ød2 are defined for each nozzle type.
- Spacing washers PD have standard height 12, the height of bearing washer PP is defined for each nozzle type.

### How to order:

Manifold type / Injection bushing dimensions (see p. 31)

Example: RX-1 / TW