


8 cavity manifold type RZ

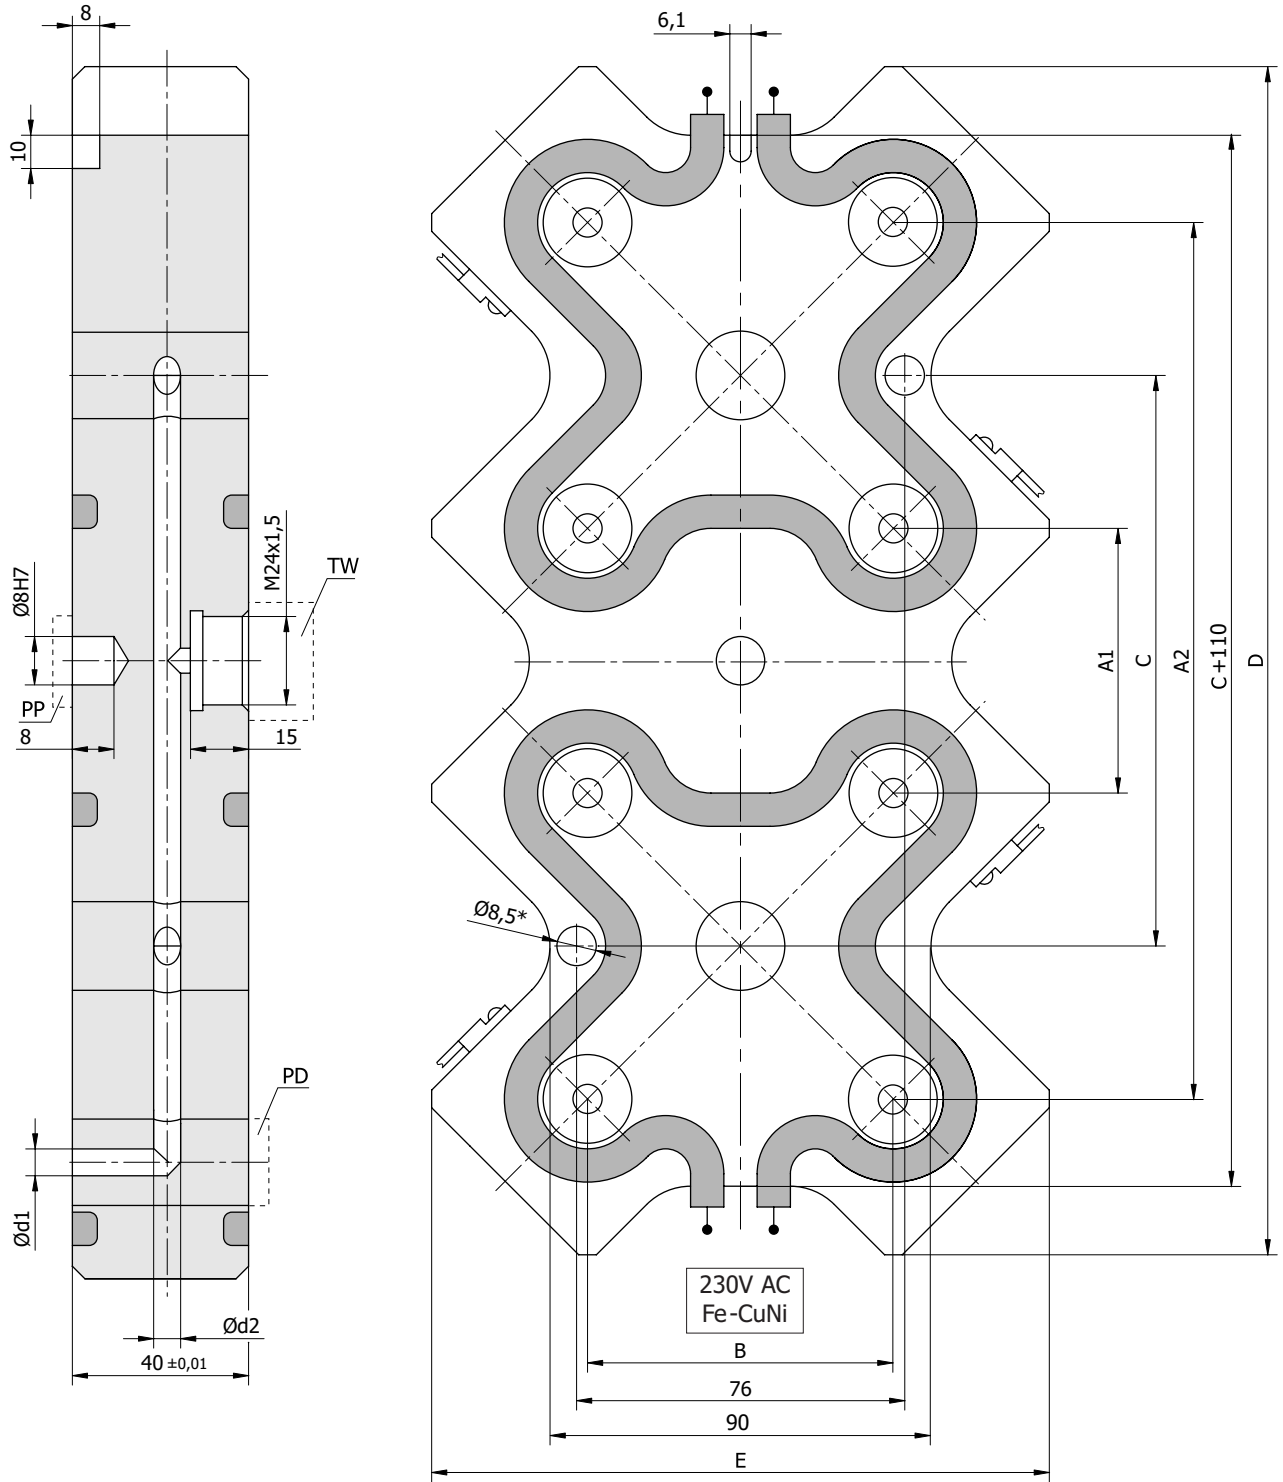

manifold type	A ₁	A ₂	B	C	D	E	Ø d1	Ø d2	P per zone	number of heating zones
RZ - 1	50	150	50	100	216	113	4	6	1500	2
RZ - 2	100	300	100	200	363	163	5,5	8	2000	2
RZ - 3	150	450	150	300	513	213	7	10	3000	2
RZ - 4	200	600	200	400	463	263	9	12	2500	4
RZ - 5	250	750	250	500	613	313	10	14	2800	4

Note:

- Dimension Ø8,5* changes into M10 thread which facilitates removing manifold from the injection mould.
- Diameters of channels inside the manifold Ød1 and Ød2 are defined for each nozzle type.
- Spacing washers PD have standard height 12, the height of bearing washer PP is defined for each nozzle type.

How to order:

Manifold type / Injection bushing dimensions (see p. 31)

Example: RZ-1 / TW